

Express Instructions

WARNING:


- Do not remove the locking key from the side plate until you complete the graphic installation.
- Use extra adhesive tape to attach the bottom of your graphic to the leader material.
- When storing a loaded banner stand be sure to replace the locking key to relieve pressure on the clamp bar and media.

Graphic Installation


- ① Use the provided allen wrench to loosen the screws on the clamp bar. Insert the top of your graphic into the clamp bar and tighten the screws. Store the allen wrench in the plastic bag attached to the bottom of the banner stand.



- ② Attach the bottom of your graphic to the tape strip on the leader material. Be sure to reinforce the connection with extra tape on both sides.




- ③ While holding the graphic firmly, remove the locking key from the base. Allow the graphic to slowly retract into the base. Place the key in the storage clips on the bottom of the banner stand.

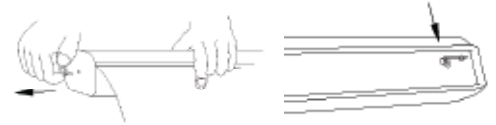

Banner Stand Setup


- ① Rotate the stabilizing feet 90° and remove the pole from the banner stand base.

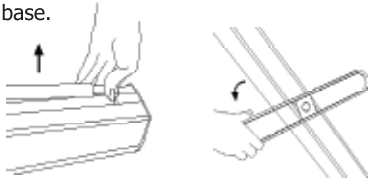

- ② Connect the pole sections together and insert pole into the hole on the base.



- ③ Insert the clamp bar hook into the top of the pole.

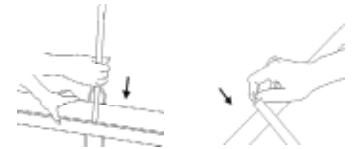

Graphic Replacement

- ① Pull out the graphic until the leader material is fully exposed. Insert the locking key into the hole on the base to lock the graphic.

- ② Carefully remove the old graphic and tape strip from the leader material and attach new double sided adhesive tape along the black line. Remove the old graphic from the top bar and follow Graphic Installation steps 1-3.